

















Industrijski ugradni profili


Profil		Šifra	Materijal	Pakovanje m ¹	Dimenzije žljeba u mm		Boja
		L5000	TPE	150	Visina	12	bela
					Širina	4-5	bež
					Zazor	5	braon
		L2020	TPE	200	Visina	-	bela
					Širina	3	bež
					Zazor	6	braon
		K3201	PVC	160	Visina	12	bela
					Širina	4-5	bež
					Zazor	5	braon
		L3000	TPE	150	Visina	12	bela
					Širina	4-5	bež
					Zazor	5	braon
		L3001	PVC	100	Visina	12	bela
					Širina	4	bež
					Zazor	5	braon
		L3002	PVC	100	Visina	12	bela
					Širina	4	bež
					Zazor	5	braon
		L7005	TPE	210	Visina	12/19	bela
					Širina	5	bež
					Zazor	-	braon
		K5286	TPE	150	Visina	12	bela
					Širina	4-5	bež
					Zazor	5	braon

TPE- termoplastični elastomer

- tvrdoća po SHORE- u 60- 65°
- izduženje od kidanja - 400%
- temperaturni raspon - 60°C do +100°C
- otporan na sve vrste boja
- upotrebljava se za drvene, PVC, aluminijumske prozore i vrata

PVC- polivinilhlorid

- tvrdoća po SHORE- u 55- 60°
- izduženje od kidanja - 420%
- temperaturni raspon - 45°C do + 65°C
- otporan na nitro i uljane boje
- upotrebljava se za drvene i PVC, prozore i vrata

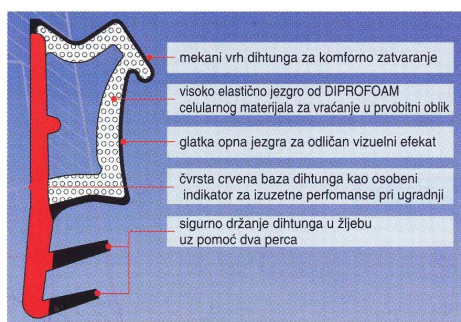

Žarkovačka 38, 11030 Beograd, Srbija
tel/fax: +381 (0)11 3559 786, 3559 856

office@neshvyl.com
www.neshvyl.com